CRT ADAPTER

BK PRECISION®

MODEL CR-16

ASSEMBLY WITH WIRES — 527-045-9-001

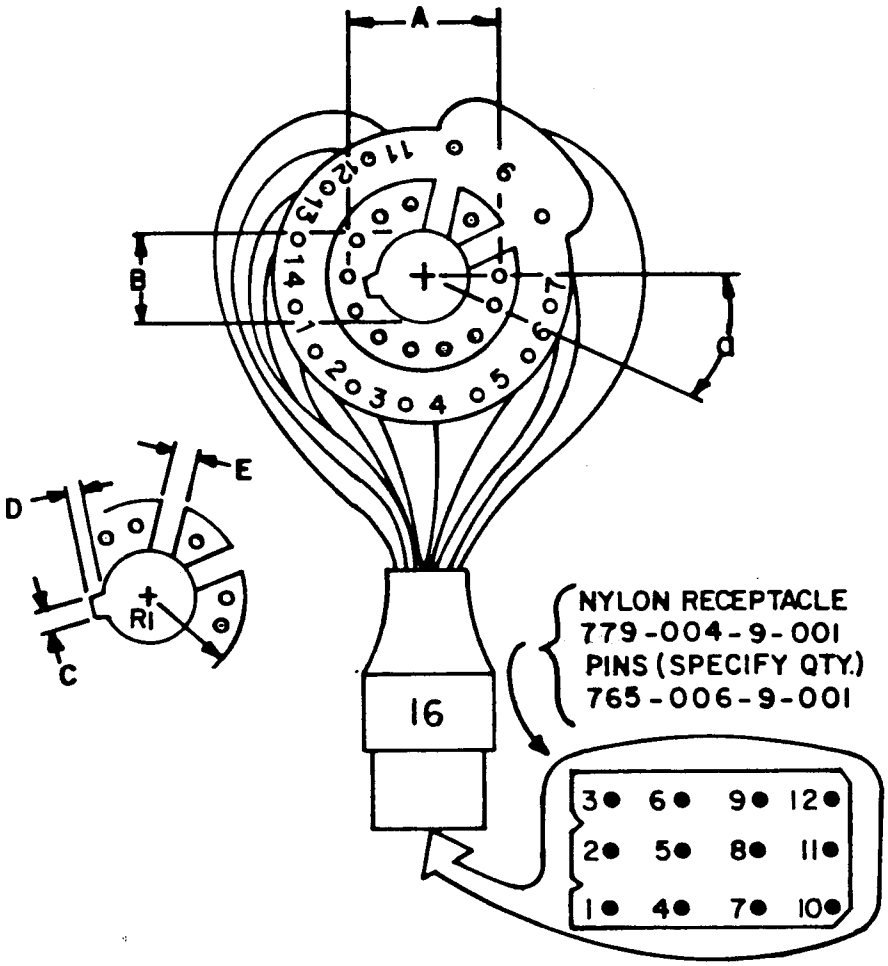

WIRING SCHEME

CRT SOCKET PIN	WIRE COLOR	NYLON RECEP-TACLE
1	BLK	1
2	YEL/RED	10
3	RED	4
4	WHT/RED	6
5	WHT/GRN	9
6	YEL/GRN	3
7	GRN	7
8	keyway	—
9	WHT	12
10	keyway	—
11	YEL/BLU	8
12	BLU	11
13	WHT/BLU	5
14	BRN	2

FITS CRT DIMENSIONS:

A	= pin circle diameter	= 20.32 mm/0.800" nom.
a	= angular pin spacing	= 25-5/7°
B	= post diameter	= 11.5 mm/0.455" max.
C	= keyway width	= 3.4 mm/0.135" max.
D	= keyway depth	= 1.77 mm/0.070" max.
E	= keyway width	= 1.83 mm/0.072" max.
R1	= outer keyway radius	= 26.24 mm/1.033" min.

BK PRECISION®

B & K-Precision, Factory Service Operations
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448

Used with B & K-Precision Models: 467, 470

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
10VAHP22	6.3	17VBGP22	6.3	19VGNP22	6.3
13VAFP22	6.3	17VBHP22	6.3	19VGRP22	6.3
13VAGP22	6.3	17VBQP22	6.3	19VGTP22	6.3
13VAHP22	6.3	17VBRP22	6.3	19VHNP22	6.3
13VAWP22	6.3	17VBSP22	6.3	19VHXP22	6.3
13VBGP22	6.3	17VBUP22	6.3	19VKHP22	6.3
13VBTP22	6.3	17VBWP22	6.3	19VKJP22	6.3
15VAGP22	6.3	17VBXP22	6.3	19VKLP22	6.3
15VAHP22	6.3	17VCDP22	6.3	19VKZP22	6.3
15VASP22	6.3	19VDCP22	6.3	21VBLP22	6.3
17VAQP22	6.3	19VFBP22	6.3	21VBMP22	6.3
17VAXP22	6.3	19VFJP22	6.3	25VEKP22	6.3
17VBAP22	6.3	19VFXP22	6.3	370VAGP22	6.3
17VBCP22	6.3	19VGLP22	6.3	A33ABD00X	6.3

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRTs that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-Precision, Factory Service Operations
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448

For information on ordering a subscription.

BK PRECISION®

16